

# FD1000-A-SS


## FLOOR DRAIN - ROUND ADJUSTABLE STRAINER

LOCATION: \_\_\_\_\_

### Specification & Function

**Specification:** SUN® FD1000-A-SS coated cast iron floor drain with anchor flange, weep holes, clamping collar, adjustable round stainless steel top with vandal resistant secured grate, 1/2" NPT trap primer (plugged) and bottom outlet.

**Function:** General purpose floor drain for use in kitchens, showers, restrooms and other finished areas with foot traffic.

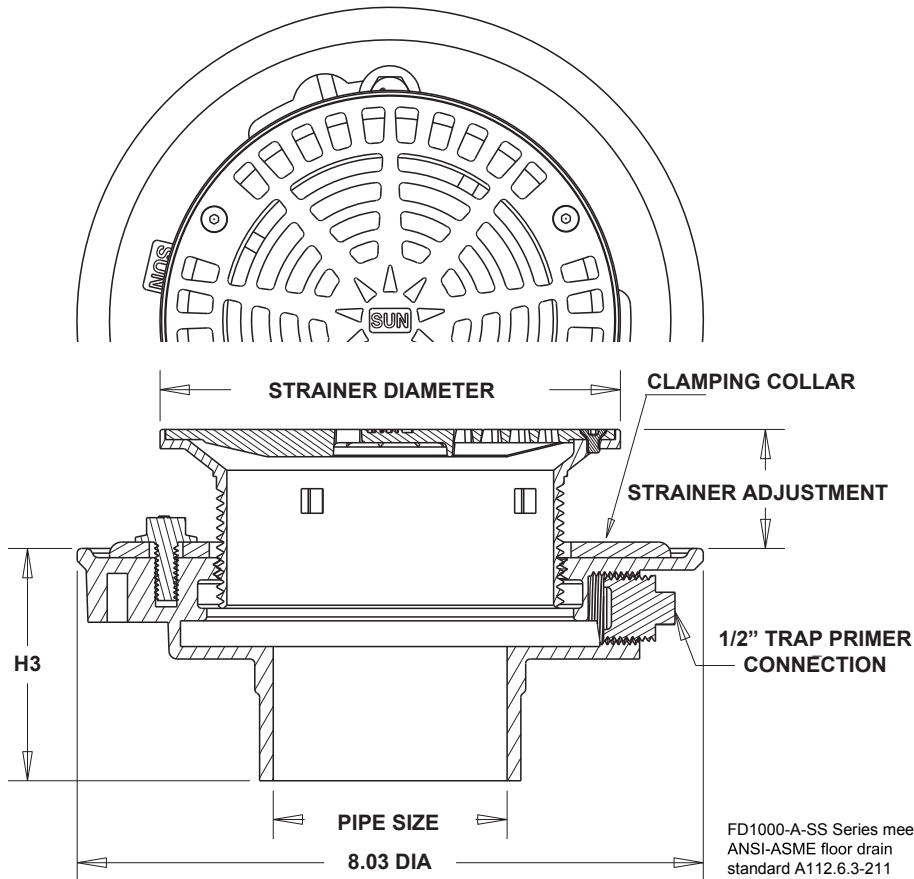

FD1000-A-SS Series meets ANSI-ASME floor drain standard A112.6.3-211

### Pipe Size

SUFFIX	DESCRIPTION
<input type="checkbox"/> 2	2" (51) Pipe Size
<input type="checkbox"/> 3	3" (76) Pipe Size
<input type="checkbox"/> 4	4" (102) Pipe Size

### Outlet Type

SUFFIX	DESCRIPTION
<input type="checkbox"/> IC	Inside Caulk
<input type="checkbox"/> NH	No Hub
<input type="checkbox"/> PO	Push On
<input type="checkbox"/> TH	Threaded Outlet

### Strainer

SUFFIX	DESCRIPTION
<input type="checkbox"/> -5A-SS	5" (127) Dia., Stainless Steel
<input type="checkbox"/> -6A-SS	6" (152) Dia., Stainless Steel

### Options

SUFFIX	OPTIONAL VARIATIONS
<input type="checkbox"/> -AR	Acid Resisting Epoxy Coated Body
<input type="checkbox"/> -B	Sediment Bucket
<input type="checkbox"/> -F4	4" Round Nickel Bronze Funnel
<input type="checkbox"/> -G	Galvanized Cast Iron
<input type="checkbox"/> -U	Strainer Extension

Metric equivalents see chart below. (Dimension) Denotes Millimeters

STRAINER DIAMETER	STRAINER ADJUSTMENT		Free Area	Test Loading
	MIN	MAX		
5"(127)	0.95	2.20	9.0 in <sup>2</sup>	HD
6"(152)	1.00	2.50	10.6 in <sup>2</sup>	HD

\* ANSI load class - HD = Heavy Duty (between 5,000 LBS and 7,499 LBS)

Pipe Size	BODY HEIGHT (H3)			
	Inside Caulk	No Hub	Push On	Threaded
2"	3.9	3.0	3.0	2.5
3"	3.9	3.0	3.0	2.5
4"	3.9	3.0	3.0	2.5

PROJECT: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_