

# RD4200-90-C-R


8" DIA. ROOF DRAIN  
SIDE OUTLET  
UNDERDECK CLAMP,  
SUMP RECEIVER

LOCATION: \_\_\_\_\_

## Specification & Function

**Specification:** SUN® RD4200-90-C-R 8" diameter roof drain with side outlet, coated cast iron body with combination membrane flashing clamp/gravel guard, aluminum dome, underdeck clamp and sump receiver.

**Function:** Used on any type of flat roofs and gutters. Aluminum dome prevents debris from entering the drain line. The anchor flange and membrane clamp provide a secure grip of membrane and roof flashing materials.

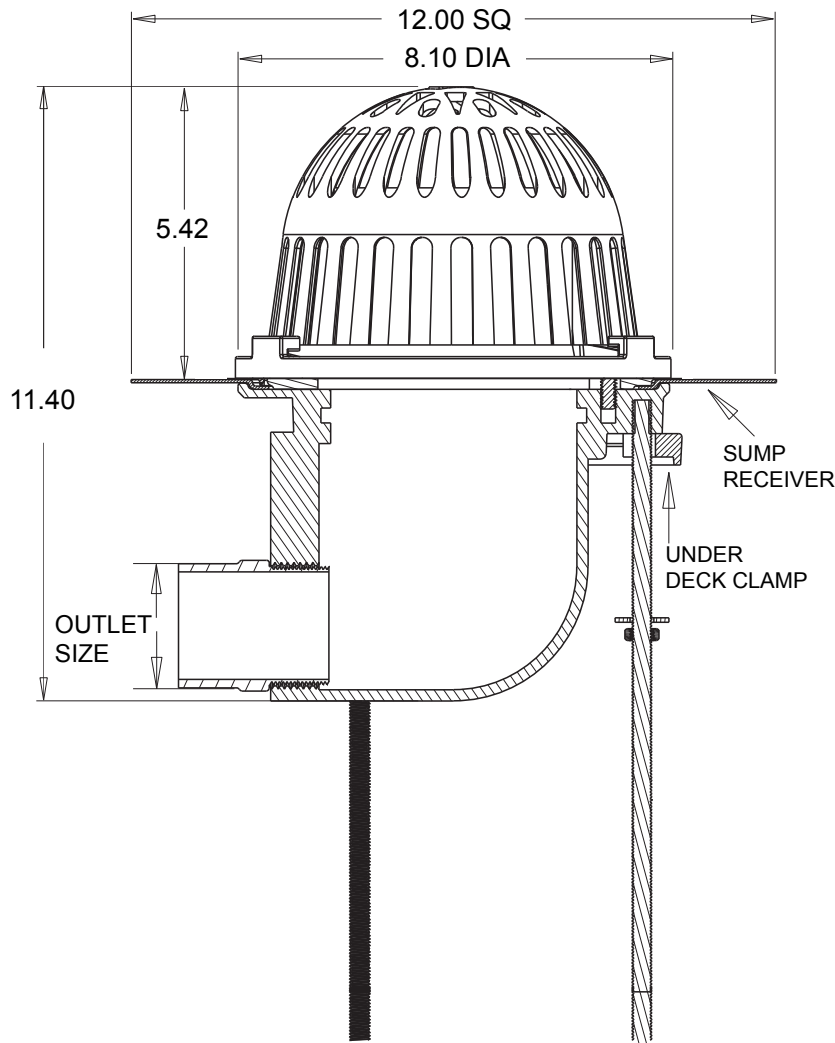

### Pipe Size

SUFFIX	DESCRIPTION
<input type="checkbox"/> 2	2" (51) Pipe Size
<input type="checkbox"/> 3	3" (76) Pipe Size
<input type="checkbox"/> 4	4" (102) Pipe Size

### Outlet Type

SUFFIX	DESCRIPTION
<input type="checkbox"/> NH	No Hub
<input type="checkbox"/> TH	Threaded

### Options

SUFFIX	OPTIONAL VARIATIONS
<input type="checkbox"/> -AR	Acid Resistant Epoxy Coated
<input type="checkbox"/> -W2	Internal water dam
<input type="checkbox"/> -G	Galvanized Cast Iron
<input type="checkbox"/> -VR	Vandal Resistant Dome

Pipe Size (In.)	Approx. Wt. Lbs.	Dome Open Area Sq. In.
2 -3 - 4	10	38.9

PROJECT: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_