

SLFD1000-S


FLOOR DRAIN - SQUARE ADJUSTABLE STRAINER

LOCATION: _____

Specification & Function

Specification: SUNLite SLFD1000-S coated cast iron floor drain with anchor flange, weep holes, clamping collar, adjustable square nickel bronze top with secured grate, vandal proof screws, 1/2" NPT trap primer (plugged) and bottom outlet.

Function: General purpose floor drain for use in kitchens, showers, restrooms and other finished areas with foot traffic.

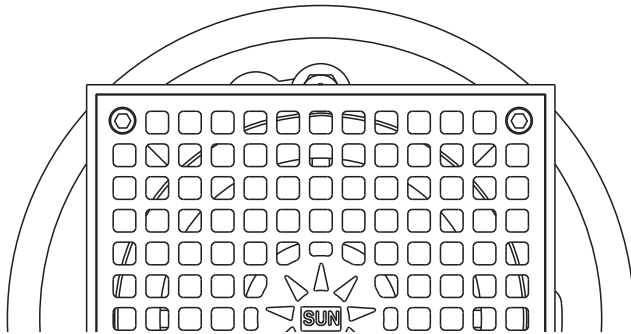

Pipe Size


| SUFFIX | DESCRIPTION |
|--------|--------------------|
| 2 | 2" (51) Pipe Size |
| 3 | 3" (76) Pipe Size |
| 4 | 4" (102) Pipe Size |

Outlet Type

| SUFFIX | DESCRIPTION |
|--------|-------------|
| NH | No Hub |
| PO | Push On |

Strainer

| SUFFIX | DESCRIPTION |
|--------|------------------------------|
| -S | 5" (127) Dia., Nickel Bronze |

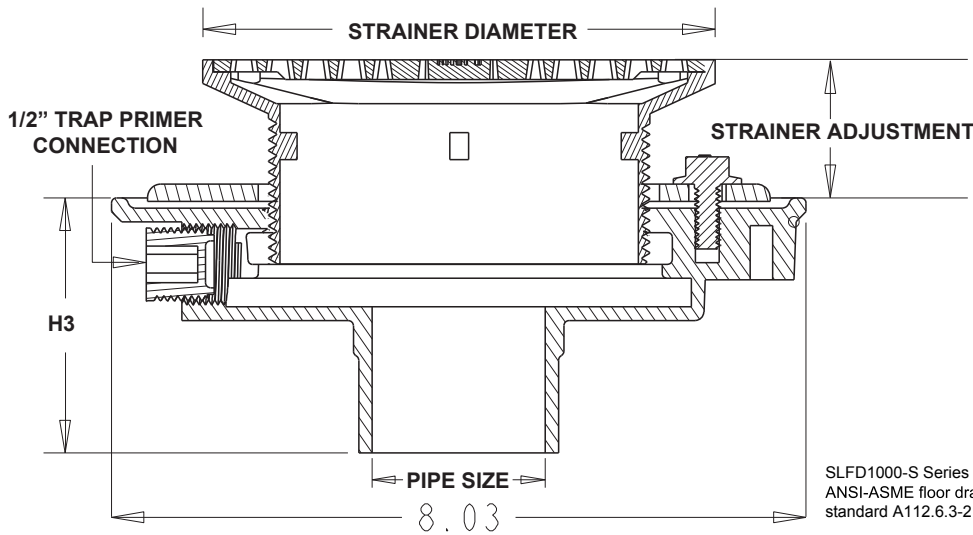

SLFD1000-S Series meets ANSI-ASME floor drain standard A112.6.3-211

Metric equivalents see chart below. (Dimension) Denotes Millimeters

| STRAINER DIAMETER | STRAINER ADJUSTMENT | | Free Area | Test * Loading |
|-------------------|---------------------|------|---------------------|----------------|
| | MIN | MAX | | |
| 5"(127) | 1.55 | 2.40 | 9.0 in ² | LD |

* ANSI load class - LD = Light Duty (< 2000 LBS)

| Pipe Size | BODY HEIGHT (H3) | |
|-----------|------------------|---------|
| | No Hub | Push On |
| 2" | 3.0 | 3.0 |
| 3" | 3.0 | 3.0 |
| 4" | 3.0 | 3.0 |

PROJECT: _____

CONTRACTOR: _____